

# HFU-1010N

## Pressurized Outside to In / Dead-end Filtration Ultrafiltration (UF) Membrane Module

Toray's PVDF membrane construction is highly resistant to chlorine and strong acids, which allows for better cleaning and optimization of filtration flux rates after cleaning. The hollow fiber modules effectively remove suspended solids, viruses, and bacteria and are certified for drinking water applications. The HFU-1010N model is ideal for small capacity equipment.

Membrane Characteristics	Units	Value
Membrane Material		PVDF (Polyvinylidene fluoride)
Nominal Pore Size	μm	0.01
Outer Membrane Surface Area	m <sup>2</sup> (ft <sup>2</sup> )	7 (75)
Operating Parameters	Units	Value
Maximum Feed water / Filtrate Flow	m <sup>3</sup> /h (gpm)	1.2 (5.1)
Maximum Backwash Flow	m <sup>3</sup> /h (gpm)	1.3 (5.7)
Maximum Air Flow	Nm <sup>3</sup> /h (scfm)	2.2 (1.3)
Maximum Inlet Pressure	kPa (psi)	300 (43.5)
Maximum Backwash Pressure	kPa (psi)	300 (43.5)
Normal Operating Transmembrane Pressure	kPa (psi)	0–200 (0–29)
Operating Temperature Range	°C (°F)	0–40 (32–104)
pH Range	During Filtration	1–10
	During Cleaning	0–12

\*Please contact Toray for operating manual and preliminary design, as capacity per module is highly dependent on feed water quality.

### Product Certifications & Compliances

- Association of Membrane Separation Technology of Japan

### Applications


Drinking water, Industrial process water, Pretreatment for seawater RO desalination, Tertiary wastewater

■ Product Datasheet

# HFU-1010N

Pressurized Outside to In / Dead-end Filtration Ultrafiltration (UF) Membrane Module

Dimensions and Weight		Unit	Value
Diameter		mm (in)	114 (4.49)
Length		mm (ft)	1,078 (3.537)
Weight	Full of Water	kg (lbs)	15 (33)
	After Draining	kg (lbs)	9 (20)
Connections		Value	
(A) Filtrate Outlet		IDF/ISO Clamp Union Fitting 1.5S	
(B) Air Outlet		IDF/ISO Clamp Union Fitting 1.5S	
(C) Feed Water / Air Inlet		IDF/ISO Clamp Union Fitting 1.5S	
Material Specifications			
Description		Material	
Casing		uPVC	
Cap		uPVC	
Potting		Epoxy	
O-ring		NBR	

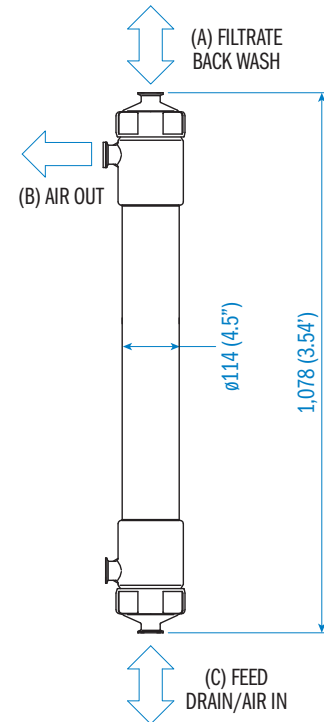

Please contact Toray for more detailed drawing and dimensions.

Toray accepts no responsibility for results obtained by the application of this information or the safety or suitability of Toray's products, either alone or in combination with other products. Users are advised to make their own tests to determine the safety and suitability of each product combination for their own purposes.

All data may change without prior notice, due to technical modifications or production changes. Please be sure to inquire about the latest product specifications.

**Headquarters**

Japan +81 3 3245 4542

**Asia Pacific**

China (TBMC) +86 10 8048 5216  
Singapore (TAS) +65 6226 0525  
Korea (TAK) +82 2 3279 7365

**Americas (TMUS)**

USA +1 (858) 218 2360

**Europe & Sub-Saharan Africa (TMEU)**

Switzerland +41 61 415 8710

**Middle East (TMME)**

Saudi Arabia +966 13 568 0091  
U.A.E. +971 4 392 8811

LinkedIn YouTube

For more info, please visit  
[water.toray](http://water.toray)